

Performance

Lifting height	11524.0 mm
Lifting height — on stabilisers	11871.0 mm
Rated capacity	3600 kg
Capacity (at max. height)	2300 kg
Capacity (at max. height on stabilisers)	3200 kg
Capacity (at max. reach on stabilisers)	1200 kg
Capacity (at max. reach)	350 kg
Max. reach	8198.0 mm
Crowding force	7800 daN

Weights

Weight (unladen)	8350 kg
------------------	---------

Traction

Standard tyres	SOLIDEAL 405/70-20 16PR
1st gear / low range	8.5 km/h
2nd gear / high range	30.0 km/h

Drive System

Main drive	Hydrostatic motor
Transmission	Hydrostatic with electronic regulation

Engine

Make / Model	Deutz TCD 3.6 L4
Fuel	Diesel
Cooling	Liquid
Rated power (ISO 14396:2002) at 2300 RPM	74.4 kW
Maximum torque at 1400 RPM	410.0 Nm
Number of cylinders	4
Displacement	3.62 L

Hydraulic System

Pump type	Gear pump with LS valve
-----------	-------------------------

Cycle Times

Lift time - no load	9.8 s
Lower time - no load	6.0 s
Telescope in time at max. reach - no load	7.9 s
Telescope in time at max. height - no load	7.9 s
Telescope out time at max. reach - no load	12.2 s
Telescope out time at max. height - no load	12.2 s

Brakes

Engine braking	Hydrostatic
Parking and emergency brake	Negative brake with hydraulic command

Fluid Capacities

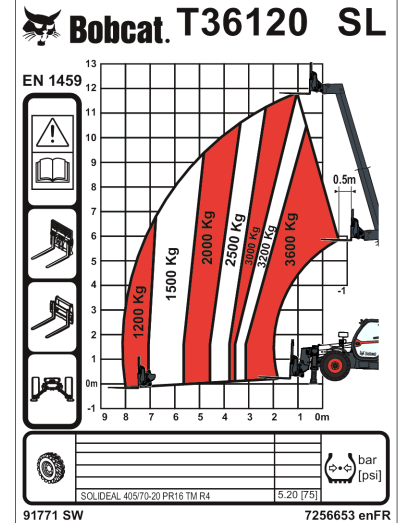
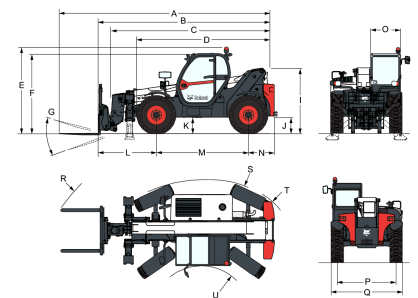
Fuel tank	130.00 L
Hydraulic reservoir	71.00 L

Environmental

Operator noise level (LpA) (EN 12053)	76 dB(A)
Level of acoustic power (LWA)	106 dB(A)
Whole body vibration (EN 13059)	0.90 ms ⁻²

Load Charts

With forks and standard 405/70x20 tyres, on stabilisers


Dimensions


(-)	857.0 mm	(L)	1793.0 mm
(A)	6647.0 mm	(M)	2850.0 mm
(B)	5442.0 mm	(N)	799.0 mm
(C)	5287.0 mm	(O)	930.0 mm
(D)	4192.0 mm	(P)	1862.0 mm
(E)	2584.0 mm	(Q)	2264.0 mm
(F)	2389.0 mm	(R)	5341.0 mm
(G)	143.0°	(R)	5429.0 mm
(I)	1941.0 mm	(S)	3765.0 mm
(J)	415.0 mm	(U)	1245.0 mm